


激光打标内容：
4 螺 紧

★ 该产品符合最新国标《电动汽车传导充电用连接装置》符合国标GB/T20234.1、2-2015要求






REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

激光打标内容：
供 电 端

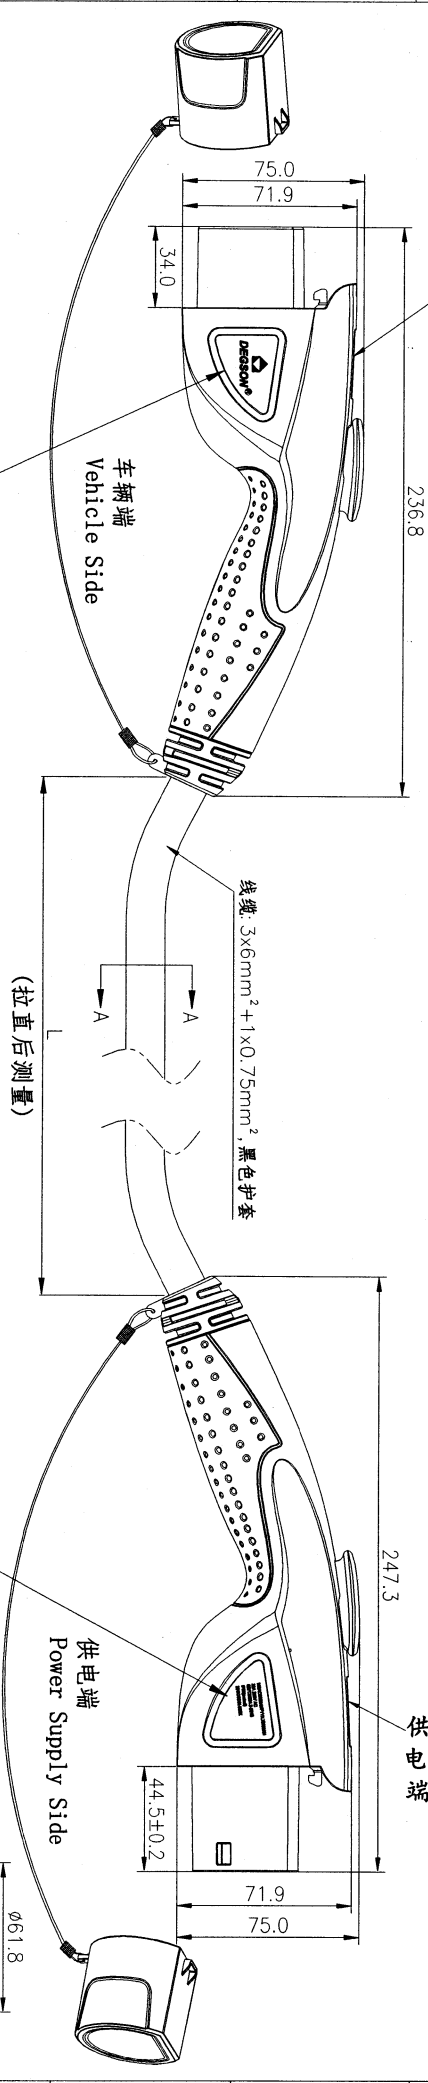

车辆端指示激光打标内容(Detail字体)如下:
DEGSON
 MGAC-S032A/VP035.0M30AH
 32A 250V AC
 GB/T20234.2-2015
 IP55(mated)
 201XXXXX-XXXX

供电端指示激光打标内容(Detail字体)如下:
DEGSON
 MGAC-S032A/VP035.0M30AH
 32A 250V AC
 GB/T20234.2-2015
 IP55(mated)
 201XXXXX-XXXX

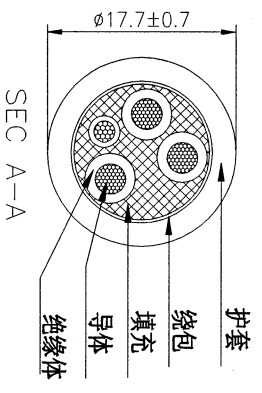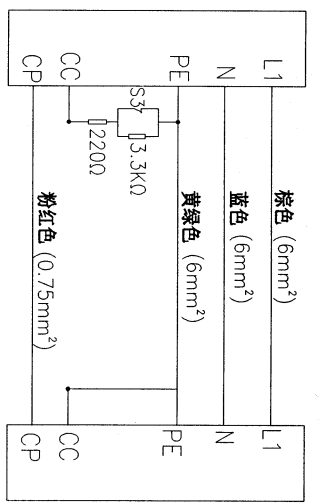

技术参数	
额定电压	250V AC
额定电流	32A
温度范围	-30℃ ~ +50℃
绝缘电阻	>5MΩ, 500V DC 1min
耐压	L, N and PE 2500V AC 1min L and N 2500V AC 1min
防水等级	IP55(Mated)
插拔寿命	10,000 Times
插拔力	<100N
标准	GB/T 20234.1、2-2015

CUSTOMER DRAWING

线性尺寸范围	.XX	X
≤6	±0.05	±0.10
6~30	±0.10	±0.20
30~120	±0.15	±0.30
120~400	±0.20	±0.50
400~1000	±0.30	±0.80
1000~2000	±0.50	±1.20
角度尺寸范围	.XX	X
	±0.5°	±1.0°

DEGSON 宁波德松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

名称: 国标交流插头枪 (32A单相)
MGAC-S-032A-VP-03-5.0M-30A(H)

标题: CUSTOMER DRAWING

APPD: ZX 20200513
CHKD: DT 2020.5.13
DRFT: LHW 2019.09.19

图例: THIRD ANGLE PROJECTION

比例: 1:1