

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

PASH-M12X-XXP-MM-SL700X-00A(H)

Coding: A,B,D

001: Cable OD: 4.5~6.0mm
 002: Cable OD: 6.0~7.5mm
 Pin number: 03,04,05,
 06,08,10,12



NOTES:

- Rated voltage/current : 3pin A: 250V / 4A
 4pin A: 250V / 4A
 5pin A: 60V / 4A
 6pin A: 30V / 2A
 8pin A: 30V / 2A
 10pin A: 30V / 1.5A
 12pin A: 30V / 1.5A
 5pin B: 60V / 4A
 4pin D: 250V / 4A
- Withstanding voltage : 3,4pin A: AC1500V/1Min
 5pin A: AC1120V/1Min
 6,8,10,12pin A: AC500V/1Min
 5pin B: AC1120V/1Min
 4pin D: AC1500V/1Min


3.Levels of protection: IP67

- 4.Wire range :
- 3pin A: 24~20AWG/0.25~0.52mm²
 - 4pin A: 24~20AWG/0.25~0.52mm²
 - 5pin A: 24~20AWG/0.25~0.52mm²
 - 6pin A: 24~22AWG/0.25~0.34mm²
 - 8pin A: 24~22AWG/0.25~0.34mm²
 - 10pin A: 26~24AWG/0.14~0.25mm²
 - 12pin A: 26~24AWG/0.14~0.25mm²
 - 5pin B: 24~20AWG/0.25~0.52mm²
 - 4pin D: 24~20AWG/0.25~0.52mm²

- Cable OD: 4.5~7.5mm
- Wire connection mode: soldering
- Operating temperature: -40°C~+105°C
- RoHS Compliance
- Tolerance : ±0.5mm

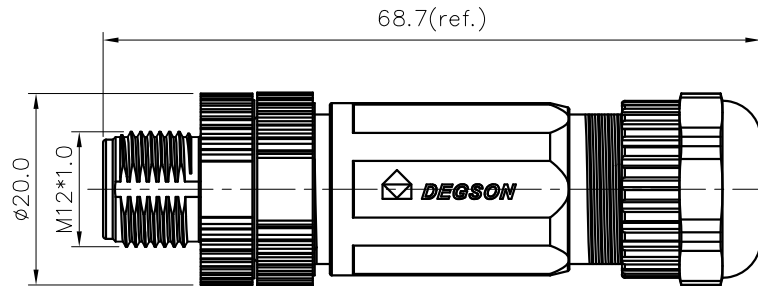

metal

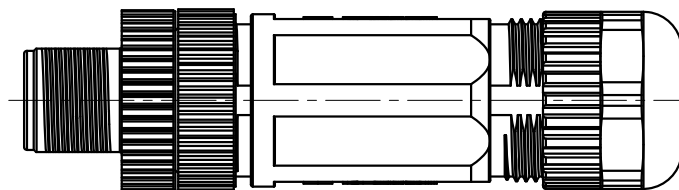

10pin A Coding	12pin A Coding	5pin B Coding	4pin D Coding	
Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	
3pin A Coding	4pin A Coding	5pin A Coding	6pin A Coding	8pin A Coding
Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View	Pin Assignments Front View

DETACHED LISTS	PART NO.: PASHM12XXXPMMSL700X00AH		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD:	NAME: PASH-M12X-XXP-MM-SL700X-00A(H)		
	CHKD:	DRFT: SQ 2019.05.17		
	THIRD ANGLE PROJECTION		TITLE: CUSTOMER DRAWING REV: D0-1 DRAWING NO.: XXXXXXXX-XX-CXX SHEET: 1/1 DO NOT SCALE DRAWING SCALE: 1:1	