


公差等级/General	Tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50			

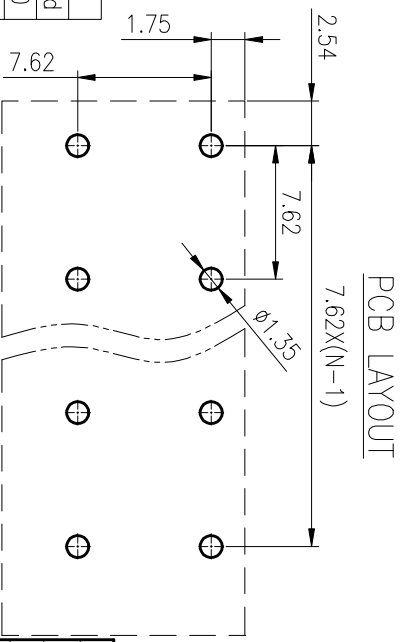

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Cover	PA66	UL94V-0
3	Button	PA66	UL94V-0
4	Clapboard	PA66	UL94V-0
5	Pin header	Copper alloy	Sn Plated
6	Spring	Stainless Steel	/

REV	ECN	DESCRIPTION	DRAFT	DATE
1				

MATERIAL: /	SURFACE: /
MAT NO.: /	
STATUS: /	
APPD: LiGL 2020.05.27	NAME: DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
CHKD: Mek 2020.05.27	DG142R-7.62-XXP-1Y-00A(H)
DRAFT: MSh 2020.05.27	DRAWING NO.: DG142R-7.62-C02
TYPE: CUSTOMER DRAWING	SCALE: 2.5:1 SHEET 1/1

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/10	300/10	300/10
IEC 标准/IEC Standard:			
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污秽等级/Pollution Degree	I	III/2	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	450/15	/
工频耐压/Withstanding Voltage	AC2500V/1Min		
线径范围(裸线/带绝缘)/Wire Range(rigid and flexible)(mm² /AWG)	0.2~1.5/22~16		
间距/Pitch(mm)/线径范围/Poles	7.62/N=02~16P		
剥线长度/Stripping length(mm)	10		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:			
PANTONE / RAL	/		