
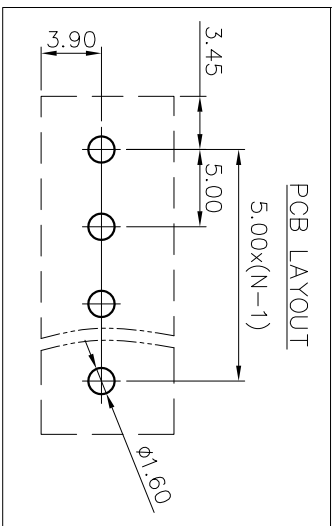
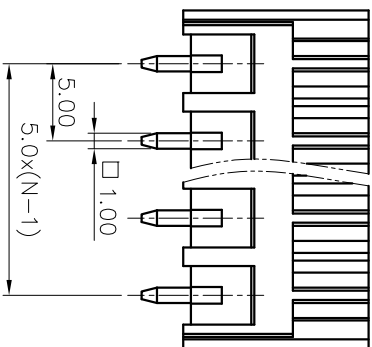





公差表/General Tolerances(mm)		0.1/1.0
0	>3	~
3	~	~
6	10	~
18	30	~
50	80	~
120	180	~
250	315	~
400	500	~
500	>500	~
±0.12	±0.18	±2
±0.22	±0.26	
±0.31	±0.37	
±0.57	±0.80	
±0.93	±1.05	
±1.51	±1.60	
±2.20	±2.50	

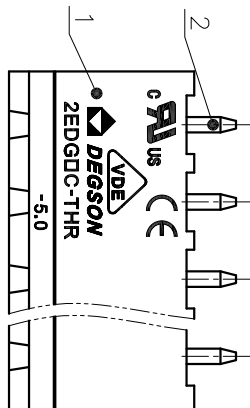

2	Pin	Copper	Sn plated
1	Housing	LCP	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电流/Rated Voltage(V)/Current(A)		300/15	/
IEC 标准/IEC Standard:			300/10
过压类别/Overvoltage Category/污染等级/ Pollution Degree		III/3	III/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	320/20
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	4
间距/Pitch(mm)/线数范围/Poles		5.0/N=02~12P	/
使用温度范围/Operating Temperature(°C)		-40~+130	/
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRAFT: CenX 2020.06.17

SIZE: A4

**DEGSON**® 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: 2EDGVC-THR-5.0-XXP-1Y-00A(H)

DRAWING NO.: 2EDGVC-THR-5.0-C01

TYPE: CUSTOMER DRAWING

D

C

B

A

REV	ECN	DESCRIPTION	DRAFT	DATE

1

2

3

4

5

6

C