


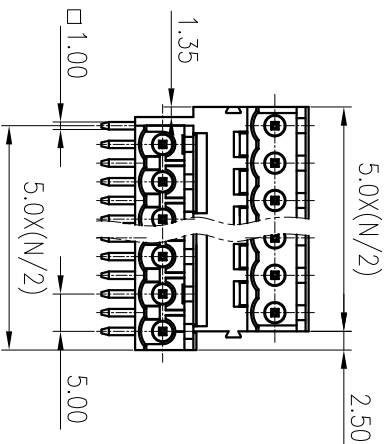
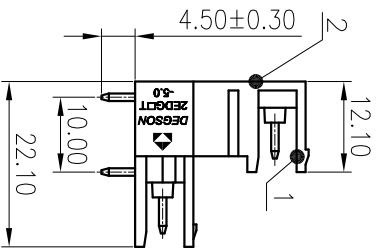


公差表/General tolerances(mm)													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10 1/2
~	~	~	~	~	~	~	~	~	~	~	~	~	
3	6	10	18	30	50	80	120	180	250	315	400	500	±2.50
H0:±12 F0:±18 F10:±22 F20:±26 F30:±31 F40:±37 F50:±43 F80:±50 F100:±57 F120:±63 F150:±70 F200:±80 F250:±90 F315:±100 F400:±110 F500:±120 F630:±130 F800:±150 F1000:±180 F1250:±200 F1600:±250 F2000:±300 F2500:±350 F3150:±400 F4000:±450 F5000:±500													



PCB LAYOUT

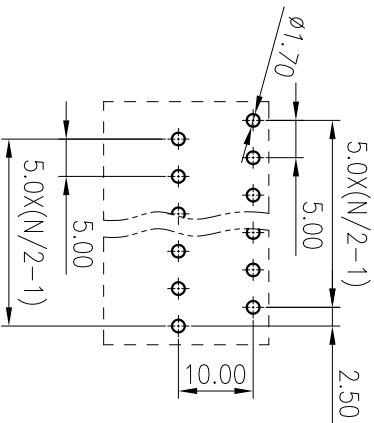

4	Short Pin	Copper	Sn Plated
3	Long Pin	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
VDE 标准/VDE Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	320/10	/
额定脉冲电压/Rate Impulse Voltage(KV)	/	4.0	/
间距/Pitch(mm)/线数范围/Poles	5.0/N=04~48P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: /

SURFACE: /

MAT NO.: /

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

STATUS: /

DEGSON®

APPD: LanChh 2020.06.01

NAME: ZEDGRT-5.0-XXP-1Y-00A(H)

CHKD: GongZh 2020.06.01

DRAWING NO.: 10002267

DRFT: ZHY 2020.06.01

TYPE: CUSTOMER DRAWING

REV ECN

DESCRIPTION

DRFT DATE

SIZE: A4

mm

(inch)

SCALE: 1:1

SHEET 1/1