
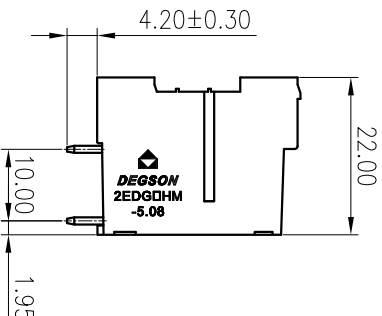
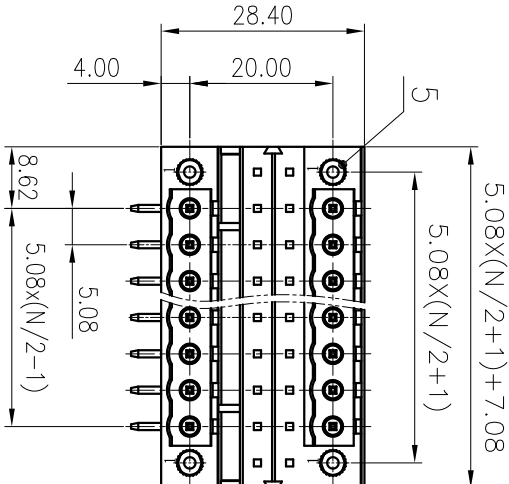



PCB LAYOUT

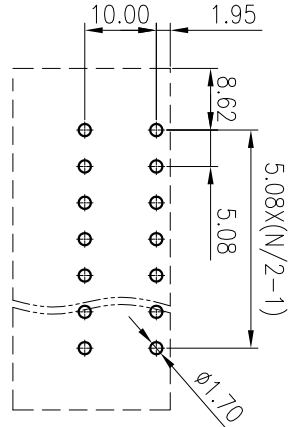

公差表/General tolerances(mm)	
0	>3
3	~6
6	~10
±0.12	±0.18
±0.22	±0.26
±0.31	±0.37
±0.57	±0.80
±0.93	±1.05
±1.15	±1.60
±2.20	±2.50
0.1/10	±2

ITEM	NAME OF PART	MATERIAL	NOTES
5	Nut	Copper Alloy	M2.5
4	Short Pin	Copper	Sn plated
3	Long Pin	Copper	Sn plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/2		
额定电压/电流/Rated Voltage(V)/Current(A)	320/10		
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4		
间距/Pitch(mm)/线数范围/Poles	5.08/N=04~44P		
剥线长度/Stripping length(mm)	7-8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: LanChH 2020.05.18
 CHKD: GongYzh 2020.05.18
 DRAFT: CenSL 2020.05.18

NAME: **DEGSON** 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: 2EDGRHM-5.08-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE

SIZE: A4
 (mm)
 (inch)

D
C
B
A

D
C
B
A