
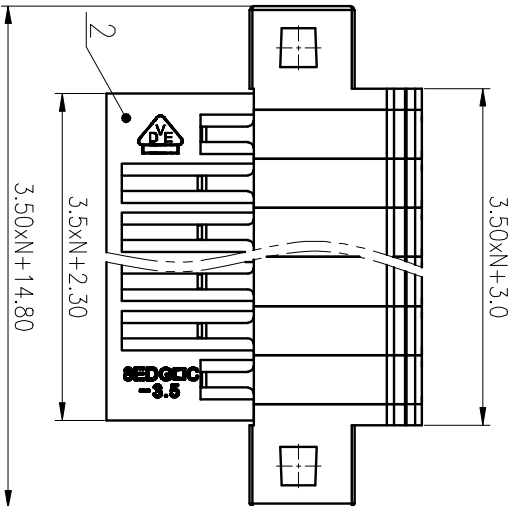
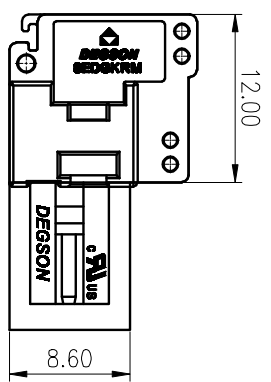
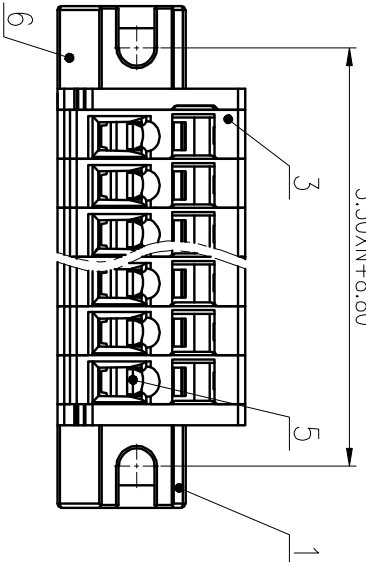


公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

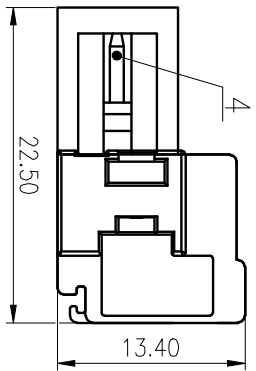

ITEM	NAME OF PART	MATERIAL	NOTES
1	Cover1	PA66	UL94V-0
2	Cover2	PA66	UL94V-0
3	Housing1	PA66	UL94V-0
4	Housing2	Copper	Sn Plated
5	Spring	Stainless steel	
6	Pin header	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/10	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	130/10	/	/
额定脉冲电压/电涌/Rated Impulse Voltage(kV)	2.5	/	/
额定冲击电压(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~1.5/28~14		
间距/Pitch(mm)/螺距/螺距/Poles	3.5/N=02~24P		
剥线长度/Stripping length(mm)	6-7		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色/Standard color	7534U		
PANTONE	SURFACE: /		

MATERIAL: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRT: Y/NDK 2019.06.27

DRAWING NO.: 8EDGKRW-3.5-C01

TYPE: CUSTOMER DRAWING

SCALE: 2:1

REV: T0

SHEET: 1/1

NAME: 8EDGKRW-3.5-XXP-11-01A(H)

NINGBO DEGSOON ELECTRICAL CO., LTD

宁波高松电子有限公司

REV	ECN	DESCRIPTION	DRT	DATE