


未注公差/General tolerances(mm)		公差/Dimensional Tolerances	
0	~	>3	~
~	>3	>6	~
~	>6	>10	~
~	>10	>18	~
3	~	30	~
6	~	50	~
10	~	80	~
18	~	120	~
30	~	180	~
50	~	250	~
80	~	315	~
120	~	400	~
180	~	500	~
250	~	>500	~
315	~	>500	~
400	~	>500	~
500	~	>500	~
>500	~	>500	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.09	±1.15	±1.50	±2.20
±2.50	±2.50	±2.50	±2.50
±7°	±7°	±7°	±7°

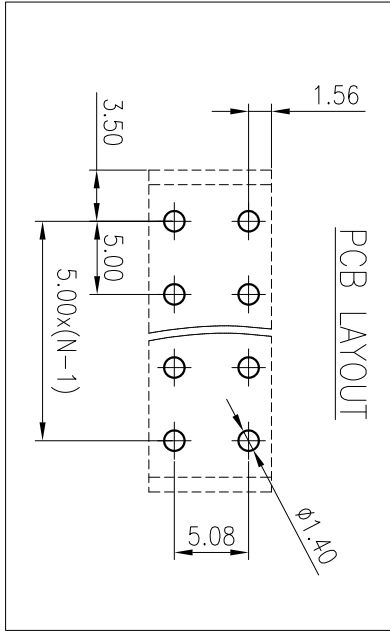

REV	ECN	DESCRIPTION	DRFT	DATE

MATERIAL:	/		
MAT NO.:	/		
STATUS:	/		
APPD:	Li GL	2020.06.17	
CHKD:	Mao J	2020.06.17	
DRFT:	Wang Y2	2020.06.17	
TYPE:	CUSTOMER DRAWING	SCALE: 2:1	SHEET 1/1
ITEM	NAME OF PART	MATERIAL	NOTES
3	Clamp	Copper alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
EC 标准/IEC Standard:	/		
过压类别/Overvoltage Category/污染等	/		
级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	320/20	320/20	630/20
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4	4	4
回扫/Pitch(mm)/线数范围/Poles	5.0/N=02~24P		4
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:	/		
PANTONE / RAL	/		
SURFACE:	/		

MATERIAL:		/	
MAT NO.:		/	
STATUS:		/	
APPD:		Li GL	2020.06.17
CHKD:		Mao J	2020.06.17
DRFT:		Wang Y2	2020.06.17
TYPE:		CUSTOMER DRAWING	SCALE: 2:1
ITEM		NAME OF PART	MATERIAL
3		Clamp	Copper alloy
2		Cover	PA66
1		Housing	PA66
UL 标准/UL Standard:		B	C
额定电压/电流/Rated Voltage(V)/Current(A)		300/15	/
EC 标准/IEC Standard:		/	
过压类别/Overvoltage Category/污染等		/	
级/Pollution Degree		III/3	III/2
额定电压/电流/Rated Voltage(V)/Current(A)		320/20	320/20
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		4	4
回扫/Pitch(mm)/线数范围/Poles		5.0/N=02~24P	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	
标准颜色编号/Standard color number:		/	
PANTONE / RAL		/	
SURFACE:		/	

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD

2EDGB-5.0-XXP-14-00A(H)

APPD:	Li GL	2020.06.17
CHKD:	Mao J	2020.06.17
DRFT:	Wang Y2	2020.06.17
TYPE:	CUSTOMER DRAWING	SCALE: 2:1
ITEM	NAME OF PART	MATERIAL
3	Clamp	Copper alloy
2	Cover	PA66
1	Housing	PA66
UL 标准/UL Standard:	B	C
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/
EC 标准/IEC Standard:	/	
过压类别/Overvoltage Category/污染等	/	
级/Pollution Degree	III/3	III/2
额定电压/电流/Rated Voltage(V)/Current(A)	320/20	320/20
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4	4
回扫/Pitch(mm)/线数范围/Poles	5.0/N=02~24P	
使用温度范围/Operating temperature(°C)	-40~+105	
符合RoHS环保要求/Conform to RoHS	Yes	
标准颜色编号/Standard color number:	/	
PANTONE / RAL	/	
SURFACE:	/	