
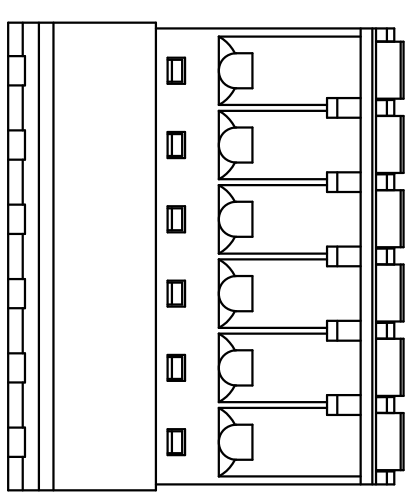
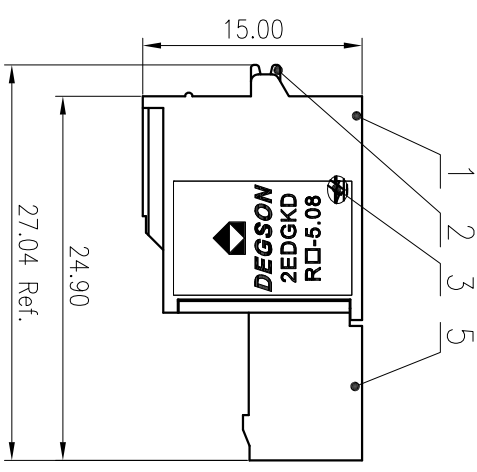
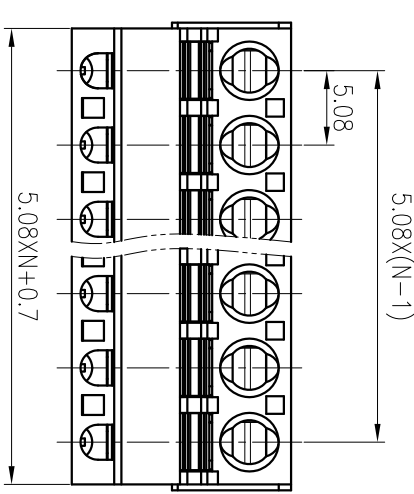


公差/General Tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±2°

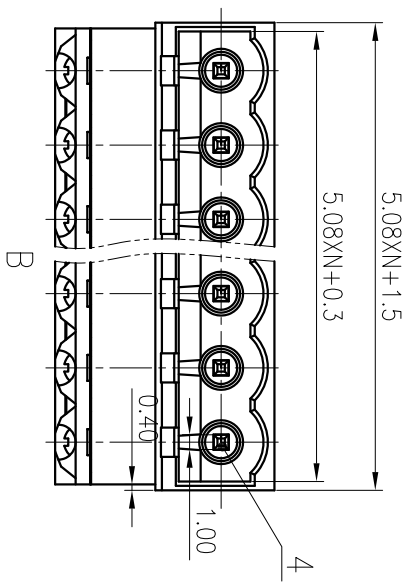

5	Cover	PA66	UL94V-0
4	Clamp	Copper	Sn plated
3	Spring	Stainless steel	
2	Button	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard: B C D

额定电压/电流/Rated Voltage(V)/Current(A) 300/10 / /

EC 标准/IEC Standard: III/3 III/2 II/2

过压类别/Overvoltage Category/污染等级/Pollution Degree III/3 III/2 II/2

额定电压/电流/Rated Voltage(V)/Current(A) / 250/12 /

工频耐压/Withstanding Voltage(V/Min) / AC2500 /

线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG) 0.2~2.5/26~12

间距/Pitch(mm)/线数范围/Poles 5.08/N=02~18P

剥线长度/Stripping length(mm) 9~10

使用温度范围/Operating temperature(°C) -40~+105

符合RoHS环保要求/Conform to RoHS Yes

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: LiGL 2020.06.03

CHKD: Mek 2020.06.03

DFT: LuoXM 2020.06.03

NAME: **DEGSON** 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

2EDGKDR-5.08-XXP-1Y-00A (H)

DRAWING NO.: 2EDGKDR-5.08-C01

TYPE: CUSTOMER DRAWING

SCALE: 2:1

SHEET 1/1

REV	ECN	DESCRIPTION	DFT	DATE

1 2 3 4

5 6

D C B A

D C B A