
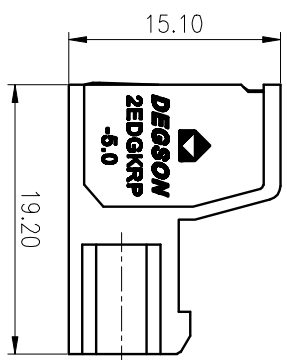
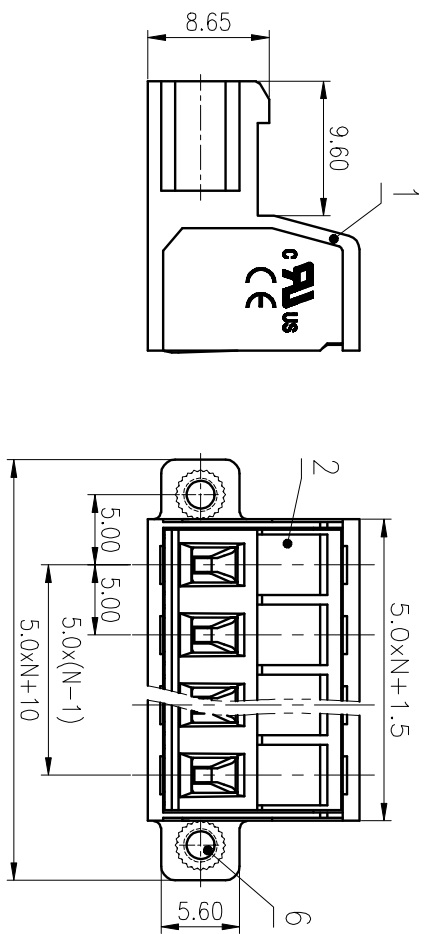


公差等级/General Tolerances(mm)		0		>3		>6		>10		>18		>30		>50		>80		>120		>180		>250		>315		>400		>500		0.1/10	
~	0	~	3	~	6	~	10	~	18	~	30	~	50	~	80	~	120	~	180	~	250	~	315	~	400	~	500	~	>500	±Z	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z																	

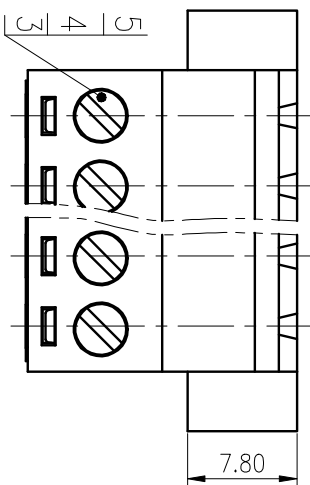

6	Nut	Copper alloy	M2.5
5	Screws	Steel	M3/Zn Plated
4	cage	Copper alloy	Ni Plated
3	Pin	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级	III/3	III/2	II/2
污染度/Pollution Degree	/	320/20	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	4	/
额定冲击电压(kV)/Rate Impulse Voltage(kV)	M3, 0.8/7.02		
额定扭矩/螺栓和螺线/Torque Tightening(N·m/Lbin)	2.5/28~12		
挠性范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	5.0/N=02~22P		
间距/Pitch(mm)/线数范围/Poles	7~8		
剥线长度/Stripping length(mm)	-40~+105		
使用温度范围/Operating temperature(°C)	Yes		
符合RoHS标准/Conform to RoHS			

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD:	LonQh 2020.05.18
CHKD:	GongZh 2020.05.18
DRT:	LY 2020.05.18
SIZE:	A4
TYPE:	CUSTOMER DRAWING
SCALE:	2:1
SHEET:	1/1

NAME:	2EDGKRP-5.0-XXP-1Y-00A(H)			
DRAWING NO.:	10002378			
REV	ECN	DESCRIPTION	DRT	DATE

DEGSON<sup>®</sup> NINGBO DEGSON ELECTRICAL CO., LTD  
 宁波高松电子有限公司