
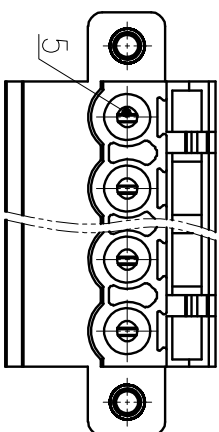
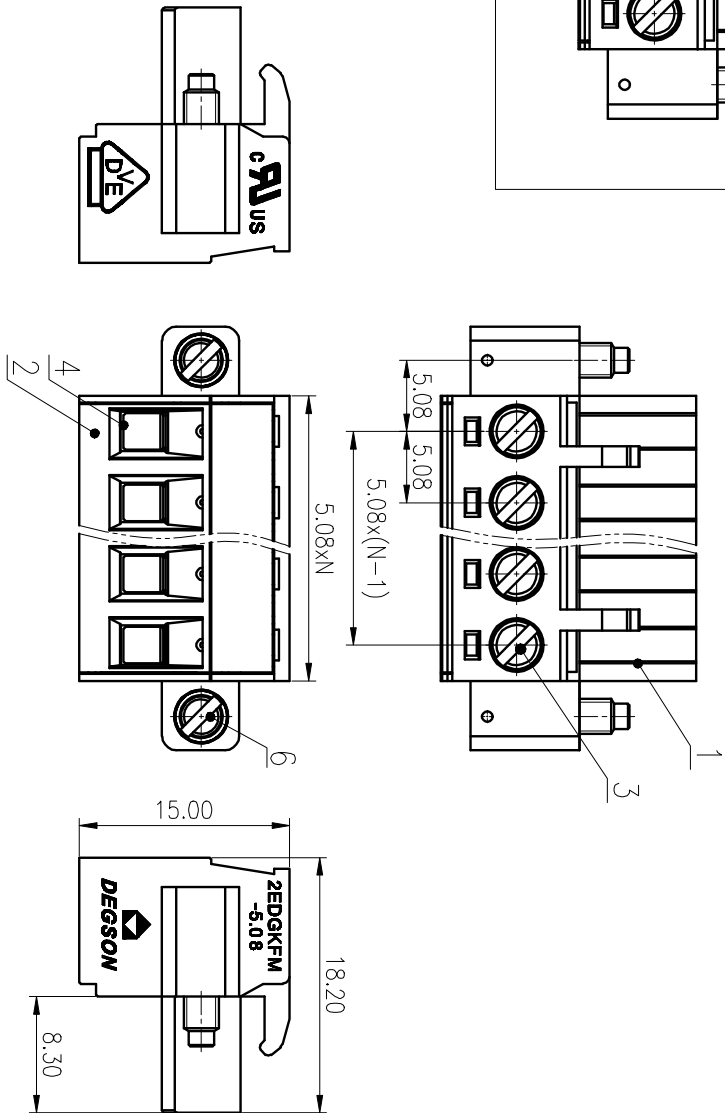


2P



6	Screw	Steel	M2.5/Zn Plated
5	Clamp	Copper alloy	Ni Plated
4	Cage	Copper alloy	M3/Sn Plated
3	Screw	Steel	M3/Zn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

ITEM NAME OF PART MATERIAL NOTES

MATERIAL: /  
SURFACE: /

MAT NO.: /  
STATUS: /

APPD: Lon CHH 2020.06.28  
CHKD: Yu JZh 2020.06.28

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**  
**ZEDGKFM-5.08-XXP-1Y-1000A(H)**

DRAWING NO.: ZEDGKFM-5.08-C01

DRAFT: XXY 2015.08.21

TYPE: CUSTOMER DRAWING

SCALE: 2:1

REV T1

1/1

精度等级/General Tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
	~	~	~	~	~	~	~	~	~	~	~	~	~	~
	3	6	10	18	30	50	80	120	180	250	315	400	500	~
	±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.43	±0.50	±0.60	±0.70	±0.80	±1.05	±1.60	±2.20
UL 标准/UL Standard:														±2
IEC 标准/IEC Standard:														±2
额定电压/电涌/Rated Voltage(V)/Current(A)														±2
过压类别/Overvoltage Category/行架等级/Pollution Degree														±2
额定电压/电涌/Rated Voltage(V)/Current(A)														±2
额定脉冲电压(V)/Rate Impulse Voltage(KV)														±2
额定扭矩/Torque Tightening(N·m/Lb.in)														±2
线径范围(裸线/绞线)/Wire Range(rigid and flexible)(mm²/AWG)														±2
间距/Pitch(mm)/线数/插孔/oles														±2
剥线长度/Stripping length(mm)														±2
使用温度范围/Operating temperature(°C)														±2
符合RoHS环保要求/Conform to RoHS														±2

III/3	III/2	II/2
/	320/20	/
/	4	/
M3, 0.5/4.43		
0.2~2.5/28~12		
5.08/N=02~24P		
7~8		
-40~+105		
Yes		

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	SCALE: 2:1	REV	SHEET
							T1	1/1

D

C

B

A

D

C

B

A