
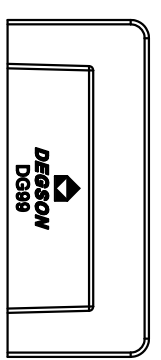
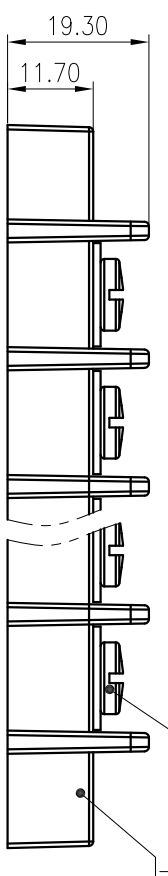
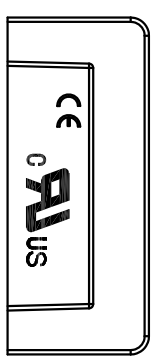


Pitch Range	In mm		Nominal Dimension		Range In mm		- 0.1/10
	Over	Under	Over	Under	Over	Under	
T0	6	10	10	30	60	100	150
T6	10	24	30	60	100	150	≤
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
							±2°

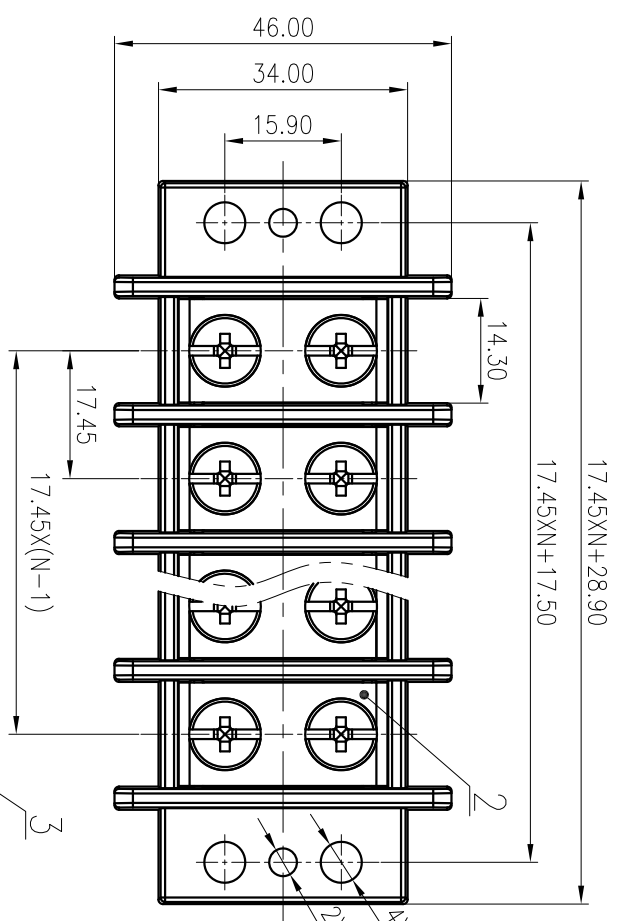

UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)(10~14AWG)	600/30	600/30	600/5
额定电压/电涌/Rated Voltage(V)/Current(A)(4~14AWG)	600/75	600/75	600/5

IEC Standard:	III/3	III/2	I/2
过压类别/Overvoltage Category/污秽等级/ Pollution Degree	III/3	III/2	I/2
额定电压/电涌/Rated Voltage(V)/Current(A)	1000/10	1000/10	1000/10
额定电涌电压(KV)/Rate Impulse Voltage(KV)	8	8	6

拧紧扭矩/Torque Tightening(N·m/Lb.in)	M5, 2.0/17.54
弹性范围(硬线/软线)/Wire Range(rigid and flexible)(mm ² /AWG)	25/4~14
间距/Pitch(mm)/线数范围/Poles	17.45/N=02~12P
使用温度范围/Operating Temperature(°C)	-40~+125
符合RoHS环保要求/Conform to RoHS	Yes

ITEM	NAME OF PART	MATERIAL	NOTES
3	Screw	Steel	Zn Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PC	UL94V-0

SURFACE: /

MATERIAL: /
 MAT NO.: /
 STATUS: /
 APPD: /
 CHKD: /

NAME: **DEGSON**® NINGBO DEGSON ELECTRICAL CO., LTD
 DG99-A-XXP-1Y-00A(H)

DRAWING NO.: DG99-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 SHEET: 1/1