
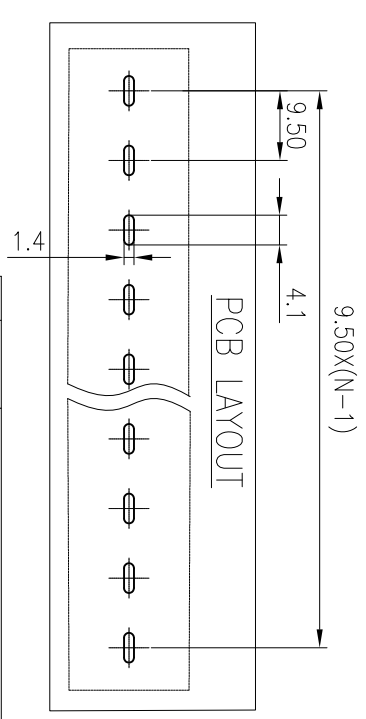
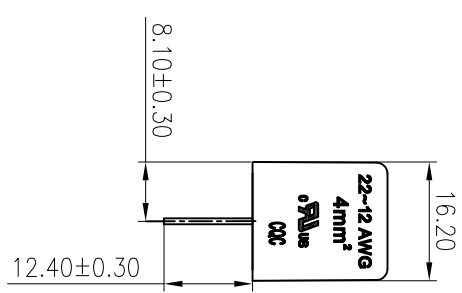
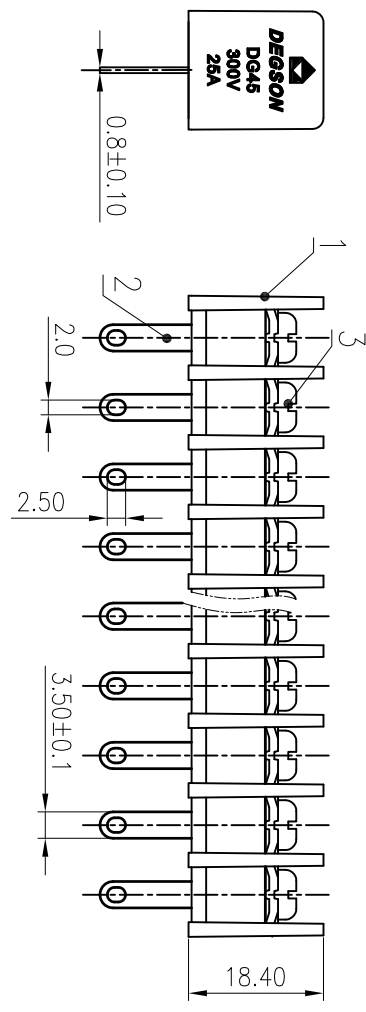
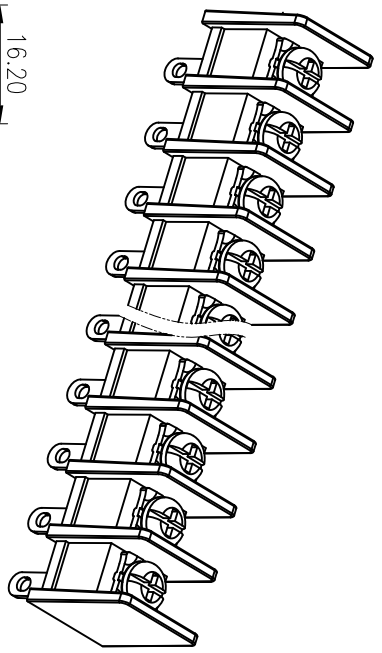


Pitch range in mm	Nominal dimension range					
	In mm		In mm			
6	over	10	over	30	over	100
10	to	10	to	60	to	150
15	to	24	to	100	to	150
20	to	24	to	60	to	150
25	to	24	to	100	to	150
30	to	24	to	60	to	150
35	to	24	to	100	to	150
40	to	24	to	60	to	150
45	to	24	to	100	to	150
50	to	24	to	60	to	150
55	to	24	to	100	to	150
60	to	24	to	60	to	150
65	to	24	to	100	to	150
70	to	24	to	60	to	150
75	to	24	to	100	to	150
80	to	24	to	60	to	150
85	to	24	to	100	to	150
90	to	24	to	60	to	150
95	to	24	to	100	to	150
100	to	24	to	60	to	150

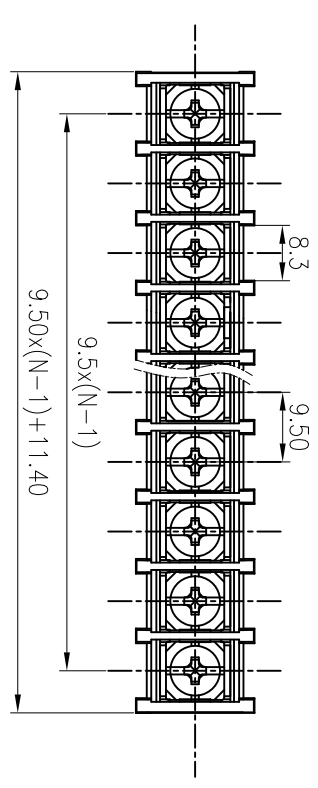

3	Screw	Steel	Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准 / UL Standard:	B	C	D
额定电压/电流 / Rated Voltage(V)/Current(A)	300/25	/	300/10
IEC 标准 / IEC Standard:	III/3	III/2	II/2
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III/3	III/2	II/2
额定电压/电流 / Rated Voltage(V)/Current(A)	500/32	600/32	1000/32
额定脉冲电压 / Rated Impulse Voltage(KV)	6	6	6
额定脉冲电流 / Rated Impulse Current(KV)	6	6	6
额定扭矩 / Torque Tightening(N·m/Lb·in)	M4, 1.2/10.53		
线径范围 / 硬线和软线 / Wire Range(rigid and flexible)(mm ² /AWG)	0.34~4/22~12		
可距 / Pitch(mm) / 线数范围 / Poles	9.50 / N=02~24P		
剥线长度 / Stripping length(mm)	8		
使用温度范围 / Operating temperature(°C)	-40~+105		
符合RoHS环保要求 / Conform to RoHS	Yes		

SURFACE: /

MATERIAL: /
 MAT NO.: /
 STATUS: work
 APPD: /
 CHKD: /

NAME: **DEGSON** 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

DRAFT: XieZhp 2020.05.25
 SIZE: A4

DRAWING NO.: DG45H-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 SHEET: 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE