


Pitch Range In mm		Nominal Dimension Range In mm					
Over	Over	Over	Over	Over	Over	Over	0.1/10
6	10	10	24	30	60	100	150
T0	T0	T0	T0	T0	T0	T0	150
6	10	24	30	60	100	150	≤
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
							±2°

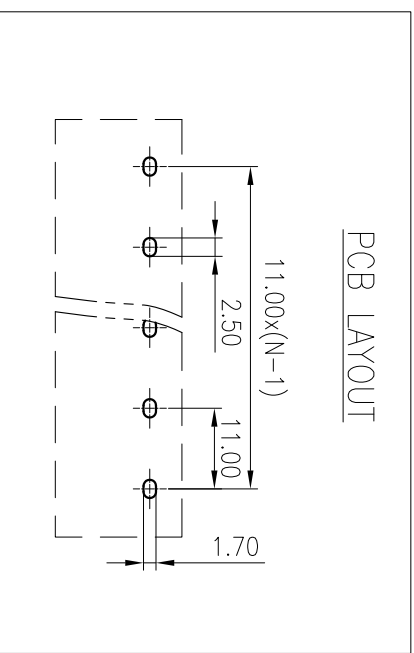

3	Screw	Steel	Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:			
	额定电压/Rated Voltage(V)	300/300	300/710
EC 标准/EC Standard:			
	过压类别/Overvoltage Category/污染等	III/3	III/2
	级/ Pollution Degree	300/32	300/32
	额定电压/电流/Rated Voltage(V)/Current(A)	4	4
	额定脉冲电压(KV)/Rate Impulse Voltage(KV)	M4, 1.2/10.53	4
	额定冲击电压(KV)/Rate Impulse Voltage(KV)	11.00/N=02~22P	12
	扭矩范围(转矩)/Wire Tightening(N.m/Lb.in)	22~10	
	线径范围(线径)/Wire Range(flexible)(AWG)		
	可焊/Pitch(mm)/线数范围/Poles	11.00/N=02~22P	
	剥线长度/Stripping length(mm)		
	使用温度范围/Operating temperature(°C)	-40~+105	
	符合RoHS环保要求/Conform to RoHS	Yes	

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRAFT: WJ NK 2020.05.29

DRAWING NO.: DG65S-C01

TYPE: CUSTOMER DRAWING

SCALE: 1:1

REV	ECN	DESCRIPTION	DRAFT	DATE

REV	ECN	DESCRIPTION	DRAFT	DATE

1 2 3 4 5 6

D B C

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

DEGSON®
DG65S-B-XXP-1Y-00A(H)

REV T0

SHEET 1/1