




(W/O COVER)

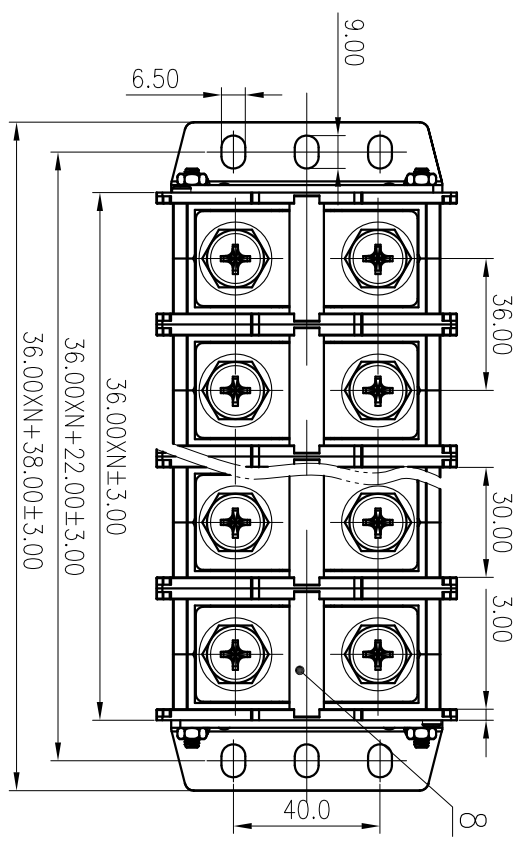

Connect pillar Refer to table "1"

POLES(N)	NO. OF PART	L(mm)
11P	S000005620(H)	410
10P	S000005610(H)	374
09P	S000005600(H)	338
08P	S000005590(H)	302
07P	S000005580(H)	266
06P	S000004970(H)	231
05P	S000004950(H)	193
04P	S000005190(H)	158
03P	S000005560(H)	122
02P	S000005290(H)	86
01P	S000007270(H)	50

Pitch Range	Over	Nominal Dimension	Over	Range	In mm	Over	Over
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
6	10	24	30	60	100	150	±
TO	TO	TO	TO	TO	TO	TO	0.1/10

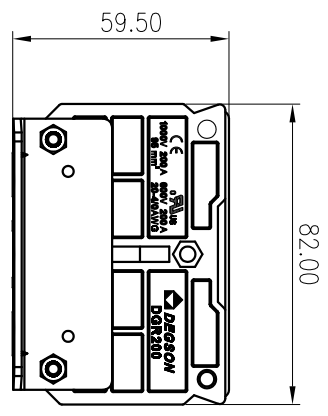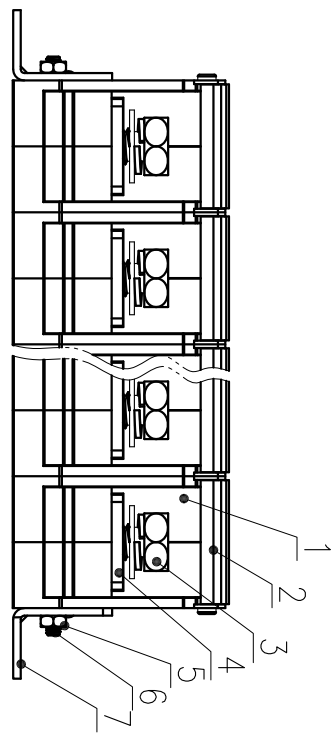

ITEM	NAME OF PART	MATERIAL	NOTES
8	TAG	PVC	UL94V-0
7	FASTENER	STEEL	Zn PLATED
6	CONNECT PILLAR	STAINLESS STEEL	
5	NUT	STEEL	Zn PLATED
4	CURRENT CARRIER	COPPER ALLOY	NI PLATED
3	SCREWS	STEEL	M10/Zn PLATED
2	COVER	PC	UL94V-2
1	HOUSING	PC	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/200	600/200	600/5
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3		
额定电压/电流/Rated Voltage(V)/Current(A)	1000/230	1000/230	1000/230
额定扭矩/Torque Tightening(N.m/Lb.in)	M10	9.0/80.00	
线径范围/Wire Range(AWG)	20~4/0		
间距/Pitch(mm)/线数范围/Poles	36.00/N=0~11P		
使用温度范围/Operating Temperature(°C)	-40~+125		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: /

MAAT NO.: /

STATUS: /

APPD: /

CHKD: /

NAME: **DEGSON**® NINGBO DEGSON ELECTRICAL CO., LTD

DGR200-XXP-1Y-20A(H)

DRAWING NO.: DGR200-C02

TYPE: CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DRFT	DATE	SIZE: A4	SCALE: 1:2	REV	TO
					mm			
					inch			