

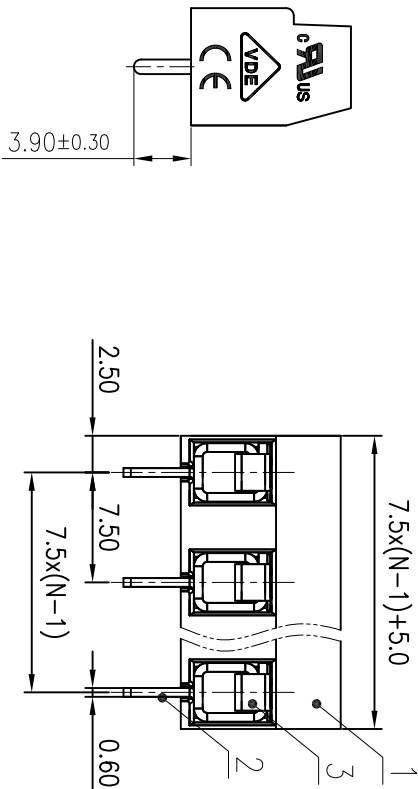
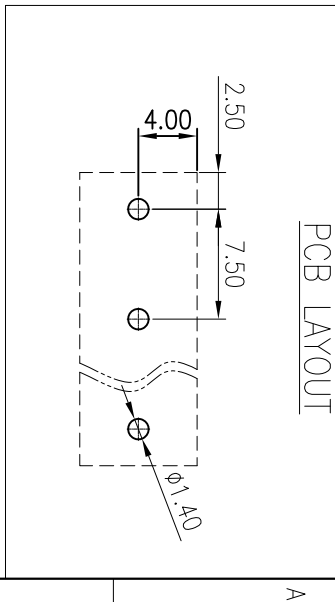


未注公差/General Tolerances(mm)		公差/General Tolerances(mm)	
0	>3	>10	>30
~	~	~	~
3	6	10	18
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±4.00	±5.00	±7.50
±10.00	±15.00	±20.00	±30.00
±0.1/1.0	±0.1/1.0	±0.1/1.0	±0.1/1.0



ITEM	NAME OF PART	MATERIAL	NOTES
4	Screw	Steel	M2.6/zn plated
3	Spring	Stainless steel	
2	Pin	Copper alloy	M2.6/Sn plated
1	Housing	PA66-GF	UL94V-0

UL Standard:		B	C	D
额定电压/Rated Voltage(V)	Current(A)	300/10	/	/
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2	
额定电压/电流/Rated Voltage(V)/Current(A)	/	450/18	/	
工频耐电压/Withstanding voltage(V/1Min)	AC2500			
螺丝扭矩/Torque Tightening(N·m/Lb·in)	M2.6: 0.35~0.4/3~3.5			
线缆范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	0.5~2.5/26~14			
间距/Pitch(mm)/线数范围/Poles	7.5/N=02~03P			
剥线长度/Stripping length(mm)	6~7			
使用温度范围/Operating temperature(°C)	-40~+105			
符合RoHS环保要求/Conform to RoHS	Yes			

MATERIAL: / SURFACE: /

MAT NO: /

STATUS: /

APPD: LanChH 2020.11.21

CHKD: Yu JZh 2020.11.21

DRAFT: CenK 2020.11.21

NAME: **DEGSON** NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: 10003834

TYPE: CUSTOMER DRAWING

SCALE: 2:1

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET
					mm			1/1
					inch			TO