
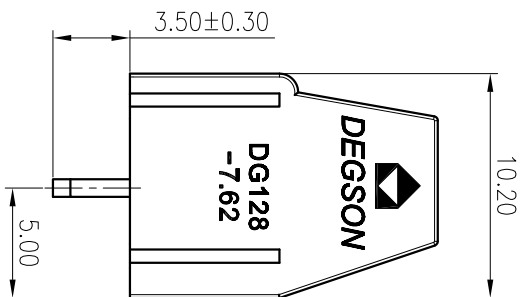
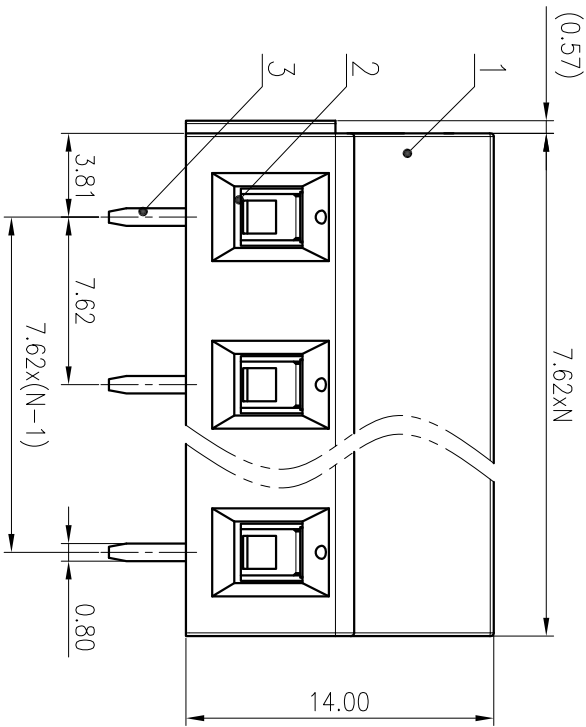


公差/General Tolerances(mm)	
0	>3
~	~
3	6
~	10
~	18
~	30
~	50
~	80
~	120
~	180
~	250
~	315
~	400
~	500
~	>500
±2	±2

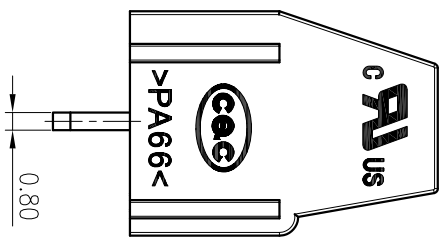

ITEM	NAME OF PART	MATERIAL	NOTES
4	Screw	Steel	M3/Zn Plated
3	Pin header	Copper alloy	Sn Plated
2	Cage	Copper alloy	M3/Ni Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)/Current(A)	300/20	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	450/18	/
工频耐压/Withstanding Voltage(V/1Min)	/	AC2500	/
螺丝扭矩/Torque Tightening(N·m/Lb·in)	M3, 0.5/4.5		
线材范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	1.0~2.5/30~12		
间距/Pitch(mm)/线数范围/Poles	7.62/N=02~16P		
剥线长度/Stripping length(mm)	6~7		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

SURFACE:

MATERIAL:

MAT NO.:

STATUS:

APPD: Lon CHH 2021.03.11

CHKD: /

DRAFT: Yu JZh 2020.02.24

DEGSSON® 宁波高松电子有限公司
NINGBO DEGSSON ELECTRICAL CO., LTD

NAME: DG128-7.62-XXP-1Y-1000A(H)

DRAWING NO.: 10001363

TYPE: CUSTOMER DRAWING

1 2 3 4 5 6

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	SCALE: 3:1	SHEET
							1/1
							TO