

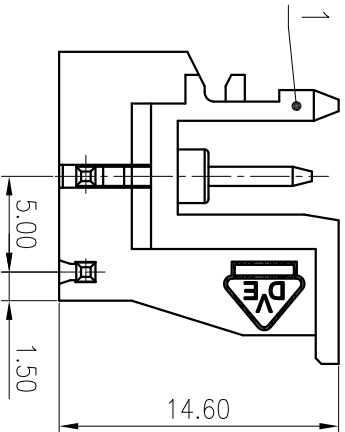
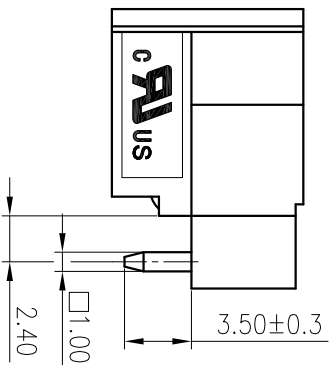


公差表/General Tolerances(mm)		0.1/10	
0	>3	>10	>18
~	~	~	~
3	6	10	18
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±0.93	±1.05	±1.15	±1.60
±2.20	±2.50		
±Z			

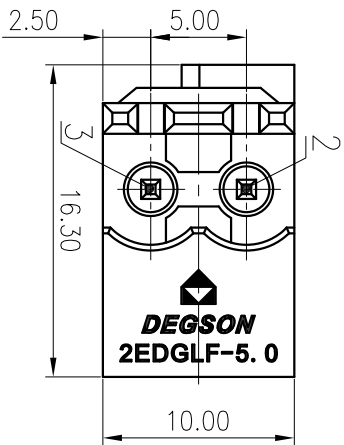

3	Pin1	Copper	Sn Plated
2	Pin2	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C D
额定电压/Rated Voltage(V)	Current(A)	300/15	/ 300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree			
		III/3	III/2
额定电压/电压(V)	Rated Voltage(V)/Current(A)	/	320/20
额定脉冲电压(KV)	Rate Impulse Voltage(KV)	/	4
使用温度范围/Operating temperature(C)			-40~+105
符合RoHS环保要求/Conform to RoHS			Yes

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD:	LonCHH 2020.05.16
CHKD:	GongYzh 2020.05.16
DRFT:	FRZ 2015.07.21

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

2EDGLF-5.0-02P-1Y-00A(H)

DRAWING NO.:	2EDGLF-5.0-C01	REV	T1
TYPE:	CUSTOMER DRAWING	SCALE:	2.5:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------