FOR-1761 Rev.1.7

Reel Name	POLE	Width/W	Pitch/P	Width/F	Width/Bo	Qty. pre reel	Reel qty. per carton	Qty. per carton
15EDGRM-THR-3.81-SINGLE POLE REEL(32)	03	32mm	12mm	14.25mm	18.41mm	470	8	3760
15EDGRM-THR-3.81-DOUBLE POLE REEL(32)	02、04	32mm	12mm	14.25mm	18.41mm	470	8	3760
15EDGRM-THR-3.81-SINGLE POLE REEL(56)	05、07、09、11	56mm	12mm	26.25mm	40.20mm	470	5	2350
15EDGRM-THR-3.81-DOUBLE POLE REEL(56)	06、08、10	56mm	12mm	26.25mm	40.20mm	470	5	2350
2EDGRM-THR-3.81-REEL(72)	12-15	72mm	12mm	34.25mm	52.90mm	380	3	1140

未注公差/General tolerances(mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.80	±2.20	±2.50

0.1/10

±2

SCALE:1:1

REELING DIRECTION

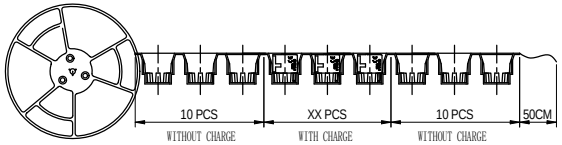

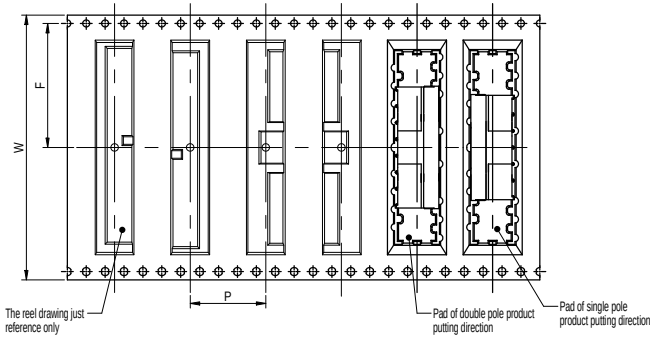



PCB LAYOUT

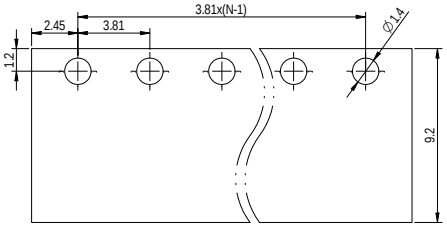

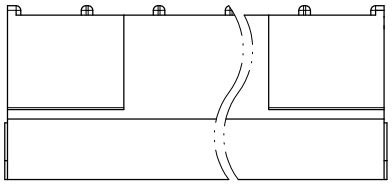

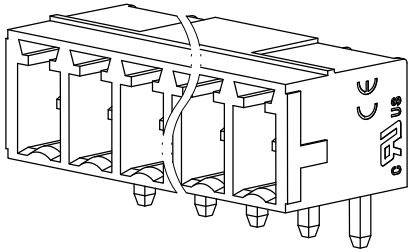



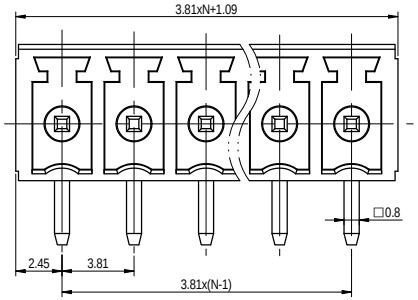

Note:
The A&Z(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
2	Pin	Copper	Sn Plated
1	Housing	Thermoplastic	UL94V-0

	B	C	D
UL 标准/UL Standard:			
额定电压/电流/Rated Voltage(V)/Current(A)	300/8	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	250/8
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	/	2.5
间距/Pitch(mm)/线束范围/Poles	3.81/N=02~15P		
使用温度范围/Operating temperature(℃)	-40~+130		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

DEGSON

APPD:	兰春华	2022.11.16	
CHKD:	姜耀元	2022.11.16	
DRAFT:	方晋盛	2022.11.16	

MATERIAL:
MAT NO./REV: - 00
SURFACE/COLOR:
MAT STATUS: 批量

NAME: 15EDGRC-THR-3.81-XXP-1Y-00A&Z(H)

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200019593	CUSTOMER DRAWING	已发布	5:1	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00			方晋盛	2022.11.16

A2 (inch)

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicitly granted. Violators will be liable for compensation. All rights reserved for patent, utility model or design registration.
转载和复制此文件以及使用或传播其内容均需事先经书面授权。违反者将承担赔偿责任。保留所有专利、实用新型或外观设计登记的权利。